

KINETIC STUDY OF PALM OIL MILL EFFLUENT (POME) TREATMENT BY ACTIVATED SLUDGE

W.L.Wun, G.K.Chua*, S.Y.Chin, N.Zainol

Faculty of Chemical & Natural Resources Engineering, Universiti Malaysia Pahang, 26300 Gambang,
Pahang, Malaysia

*Corresponding author: chua@ump.edu.my

Tel: 09-5492828, Fax: 09-549 2399

ABSTRACT

Kinetic parameter is a basis for design and optimization of activated sludge POME treatment. In fact, most of the kinetic parameter value used in design and optimization are default values taken from municipal wastewater. The kinetic parameters for POME treatment have not been thoroughly studied and most of the system is using the Activated Sludge Models (ASM), either in modelling or design. Thus, the kinetic study of POME treatment by activated sludge system were carried out to obtain the kinetic parameters for the POME treatment plant design calculation. In this study, POME treatment was carried out in batch studies into 14 L aeration tank with activated sludge for the biological oxidation process with optimum pH at 6.5 ± 0.1 , MLVSS of 2000 ± 200 mg/L for HRT of 48 h and feeding with 650 ± 20 mg BOD₃/L of anaerobic treated POME, while SRT was controlled at a range of 10 days to 20 days with interval of 2 days for the kinetic study experiment. From this kinetic study, the kinetic parameters for COD and BOD basis had been determined for maximum yields coefficient (Y), endogenous decay coefficient (k_d), maximum specific substrate utilization rate (k) and half-velocity constant (K_s) at 0.2369 mg VSS/mg COD, 0.1060 day^{-1} , 2.2717 day^{-1} and 758.7705 mg/L for COD basis whilst the kinetic parameters value for BOD basis were 0.6718 mg VSS/mg BOD₃, 0.0658 day^{-1} , 1.4136 day^{-1} and 556.1526 mg/L, respectively. Since the BOD is one of the discharge parameters in discharge regulatory, thus kinetic parameters for BOD basis will be used for the system design of POME treatment.

Keywords: Kinetic study; Kinetic parameter; Palm oil mill effluent; Activated sludge

1.0 INTRODUCTION

Palm oil industry is one of the very important agriculturally based industries in Malaysia for the past decades. According to the statistic of Malaysian Palm Oil Board (MPOB) in year 2017 (MPOB, 2017), total 454 of palm oil mills in Malaysia have produced about 112.19 million tonne of Fresh Fruit Bunch (FFB). Yacob *et al.* (2005) estimated that approximately 0.50 - 0.75 tonnes of Palm Oil Mill Effluent (POME) will be discharged for every tonne of FFB from mill. Thus, total POME discharged to the river in year 2016 was estimated in the range of 56.10 – 84.14 million tonnes. The raw POME which is generated by palm oil mill is hot, acidic (pH between 4.0 to 5.0) and brownish colloidal suspension containing high concentration of organic matter, i.e.

COD (50,000 mg/L), BOD (25,000 mg/L), total solids (40,500 mg/L) and oil & grease (4,000 mg/L) (Alhaji, 2016). When the untreated POME discharged into the water bodies, it may have a deleterious environmental impact especially to the aquatic life (Azmi & Yunos, 2014).

In order to comply with the DOE discharge standard, other technologies or systems had been used in conjunction with the conventional ponding treatment system, especially the activated sludge system that is considered as low operating cost, simple and ease of handling (Wong, 1980; Ma & Ong, 1984). However, the discharged POME has yet to meet with the regulatory discharge limit consistently. In practical, the activated sludge system is designed and calculated based on the organic loading concentration, namely BOD₃ and COD from the raw POME by referring to the DOE design guidance book (DOE, 2010a), which is typically based on the empirical design criteria that adopted from sewage wastewater.

In the past, the biological wastewater treatments plant was designed based on the empirical parameters which developed by observation and experience such as aeration detention time, hydraulic retention time and organic loading rate. However, over the last decades, the design of biological wastewater treatment plant was based on biological kinetic equations which have been developed according to the concepts of microbial growth kinetics to determine the kinetics coefficient such as maximum yield coefficient (*Y*) and endogenous decay coefficient (*k_d*), maximum specific substrate utilization rate (*k*) and half-velocity constant (*K_s*).

According to Tchobanoglous & Stensel (2004), value *Y* and *K_d* can be obtained from the equation from the biomass mass balance of the activated sludge process that is shown in Eq. (1).

$$\frac{1}{\theta_c} = Y \frac{Q_i (S_i - S_e)}{X V_r} - k_d \quad (1)$$

where θ_c = Solid retention time (day)

Y = Yield coefficient (mg VSS/mg BOD)

Q_i = Flow of influent (L/day)

S_i = Influent concentration (mg BOD/L)

S_e = Effluent concentration (mg BOD/L)

X = Mixed liquor volatile suspended solid (MLVSS) in aeration tank
(mg VSS/L)

V_r = Aeration Tank volume (L)

k_d = Endogenous decay coefficient (day⁻¹)

While value k and K_s can be determined from the specific substrate utilization rate, U as shown in Eq. (2).

$$U = \frac{kS_e}{(K_s - S_e)} \quad (2)$$

where k = Specific substrate utilization rate (day^{-1})

S_e = Effluent concentration (mg BOD/L)

K_s = Half-velocity constant (mg/L of BOD)

As mentioned in DOE guidance document, for conventional aeration activated sludge system design, default value for yield coefficient (Y) and decay coefficient (k_d) are 0.4 – 0.8 kg VSS/kg BOD₅ and 0.03 – 0.15 day^{-1} respectively. Meanwhile, default value for yield coefficient (Y) and decay coefficient (k_d) are 0.1 – 0.3 kg VSS/kg BOD₅ and 0.03 – 0.15 day^{-1} respectively for extended aeration activated sludge system design (DOE, 2010a).

In determination of kinetic parameters in the activated sludge process of domestic wastewater, Najafpour *et al.* (2007) had reported that the decay coefficient (k_d), maximum specific substrate utilization rate (k) and half-velocity constant (K_s) were determined to be 0.06 day^{-1} , 1.71 day^{-1} and 85.5 mg/L, respectively with SRT of 8 days and a COD removal efficiency up to 90%. However, there was no yield coefficient has been reported in this study. In other literatures of municipal wastewater study, the investigation had shown that the yield coefficient (Y), decay coefficient (k_d), maximum specific substrate utilization rate (k) and half-velocity constant (K_s) for conventional activated sludge process were in the range of 0.48–0.80 mg VSS/mg sCOD, 0.0189–0.0260 day^{-1} , 0.95–0.98 day^{-1} and 52–71 mg sCOD/L, respectively, and for extended aeration activated sludge system, the yield coefficient (Y), decay coefficient (k_d), maximum specific substrate utilization rate (k) and half-velocity constant (K_s) for conventional activated sludge process were in the range of 0.6174–1.2512 mg VSS/mg sCOD, 0.0198–0.0309 day^{-1} , 1.96–3.17 day^{-1} and 311.7–508.0 mg sCOD/L, respectively (Mardani *et al.*, 2011). Kinetic study of POME in Sequencing Batch Reactor (SBR) system by respirometry method also been reported for Y , k_d , and K_s at value of 0.272 mg VSS/mg COD, 0.131 day^{-1} and 429 mg/L of COD, respectively (Lim & Vadivelu, 2014).

2.0 MATERIALS AND METHODS

2.1 POME Sample Preparation and Characteristic

Anaerobic treated POME was collected from Anaerobic Pond 4 in Neram Palm Oil Mill, Kemaman, Terengganu. The sample was stored at 4°C until the experiment.

2.2 Reactor Set Up

Experiment for kinetic study of activated sludge in POME treatment was carried out in batch studies by transferring 5 L of acclimated activated sludge into 14 L aeration tank completed with air flow output of 110 L/min and pressure at 2 MPa aquarium air pump as shown in Figure 1.

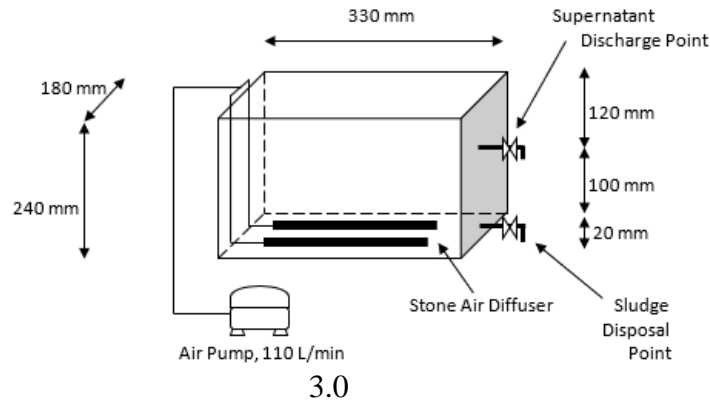


Figure 1: Line sketch of sequencing batch reactor

The experiment was carried out bases on the F/M ratio of 0.3 kg BOD/kg MLVSS.day with the optimum condition that gained from the previous studies, where optimum pH at 6.5 ± 0.1 with 2000 ± 200 mg/L of MLVSS in the system for HRT of 48 h and feeding with 650 ± 20 mg BOD₃/L of POME (Wun *et al.*, 2017). For this kinetic study, experiment was carried out in batch mode and all the experiments were run in quadruplicate where SRT was controlled at a range of 10 to 20 days with interval of 2 days by adjusting the volume of sludge wasting from the aeration tank according to the Eq. 3 below.

$$\theta_c = \frac{V_r X}{(Q_i - Q_w) X_e + Q_w X_w} \quad (3)$$

Where Q_w = Flow of wasted activated sludge (WAS) (L/day)

X_e = TSS of effluent (mg/L)

X_w = TSS of wasted activated sludge (mg/L)

Since the $X_w \gg X_e$, thus,

$$\theta_c = \frac{V_r X}{Q_w X_w} \quad (4)$$

So, the flowrate of wasted activated sludge (L/day) that need to be removed from the aeration tank for the different solid retention time is:

$$\theta_w = \frac{V_r X}{Q_c X_w} \quad (5)$$

For the Y and K_d determination, by linearizing the Eq.1:

$$\frac{1}{\theta_c} = YU - k_d \quad (6)$$

$$\text{Where } U = \frac{S_i - S_e}{\theta X} \quad (7)$$

A plot of reciprocal of solids retention time, $1/\theta_c$ (day^{-1}) versus specific substrate utilization rate, U (day^{-1}) can be constructed using the data obtained from the above experiment to get the maximum yields coefficient (Y) and endogenous decay coefficient (k_d) from the gradient and the y -intercept of the plot, respectively. Similar with above methods, by linearizing Eq. 2, maximum specific substrate utilization rate (k) and half-velocity constant (K_s) can be obtained as following equation (Eq. 8):

$$\frac{1}{U} = \frac{K_s}{kS_e} + \frac{1}{k} \quad (8)$$

A plot of reciprocal of specific substrate utilization rate, $1/U$ (day) versus reciprocal effluent BOD_3 , $1/S_e$ (L/mg) can be constructed using the data obtained from above similar experiment and determined the maximum specific substrate utilization rate (k) and half-velocity constant (K_s) value from the gradient and the y -intercept of the plot, respectively.

2.3 Analytical Methods

All analytical determination of BOD_3 , COD, TSS and MLVSS were carried out in accordance with the Standard Methods for the Examination of Water and Wastewater (APHA, 1989). According to the EQA 1974, BOD_3 for POME sample were analysed for 3 days incubation at 30°C . COD was measured according to Reactor Digestion Method (Method 8000) at a wavelength of 620 nm (APHA 5220 D) by using DRB 200 Reactor and measured by DR 890 Spectrophotometer. TSS were measured as outlined in Standard Methods APHA 2540 D (total suspended solids dried at $103\text{-}105^\circ\text{C}$) while MLVSS were measured as outlined in Standard Methods APHA 2540 E (volatile solids ignited at 550°C). pH was measured by using pH meter (Seven Easy, Mettler Toledo, USA) and was conducted according to Standard Methods APHA 4500-H⁺ B.

3.0 RESULTS AND DISCUSSION

For the kinetic analysis experiment, the batch study was conducted where performance data were measured and recorded. The performance data including BOD_3 concentration of POME influent and effluent, COD concentration of POME influent and effluent, mixed liquor volatile suspended solids, flow rate of influent and wasted activated sludge as well as volatile suspended solids concentration of wasted activated sludge as shown in Table 1. The MLVSS concentration in aeration tank was found increase gradually from 2,190 mg/L to 3,756 mg/L for solid retention time (θ_c) of activated sludge from 10 to 20 days, by converting the POME organic matter into the biomass via biodegradation process. Nevertheless, the reduction of BOD_3 and COD was found not significant, which might due to the present of non-readily biodegradable matter in POME that not easily biodegraded by microorganism (Rasdy *et al.*, 2008)

Table 1: Performance data for the batch study in POME treatment by activated sludge

θ_c (day)	Influent BOD, S_{ib} (mg/L)	Influent COD, S_{ic} (mg/L)	MLVSS , X (mg/L)	TSS WAS, X_w (mg/L)	Flow WAS, Q_w (L/day)	Effluent BOD, S_{eb} (mg/L)	Effluent COD, S_{ec} (mg/L)
10	684	2,464	2,190	2,933	0.34	122	458
12	659	2,388	2,588	3,188	0.28	98	412
14	668	2,468	2,750	3,776	0.25	94	386
16	659	2,483	3,214	4,426	0.22	86	342
18	667	2,588	3,467	5,567	0.19	83	326
20	644	2,456	3,756	5,687	0.18	78	310

From the plot as shown in Figures 2 and 3, kinetic parameters of POME treatment by activated sludge process for maximum yields coefficient (Y), endogenous decay coefficient (k_d), maximum specific substrate utilization rate (k) and half-velocity constant (K_s) for BOD₃ and COD were determined and summarized in Table 2.

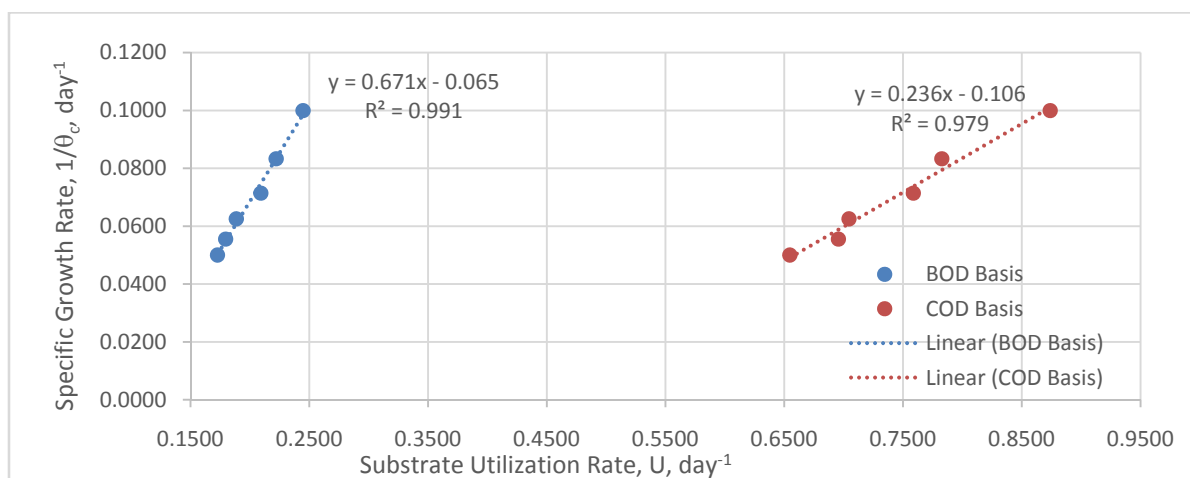


Figure 2: Plot of specific growth rate versus substrate utilization rate for maximum yields coefficient (Y) and endogenous decay coefficient (k_d) determination by using BOD₃ and COD result

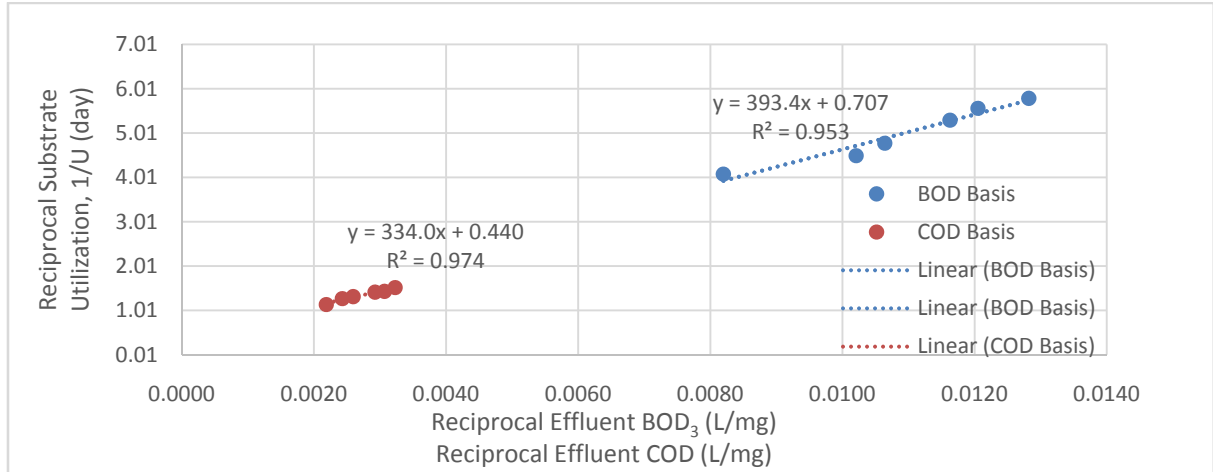


Figure 3: Plot of reciprocal substrate utilization versus reciprocal effluent for maximum specific substrate utilization rate (k) and half-velocity constant (K_s) determination by using BOD₃ and COD result

Table 2: Kinetic parameters for the POME treatment by activated sludge process

POME concentration	Kinetic Parameters	Unit	Value
BOD ₃	Y	mg VSS/mg BOD ₃	0.6718
	K_d	day ⁻¹	0.0658
	K_s	mg/L of BOD ₃	556.1526
	k	day ⁻¹	1.4136
COD	Y	mg VSS/mg COD	0.2369
	K_d	day ⁻¹	0.1060
	K_s	mg/L of COD	758.7705
	k	day ⁻¹	2.2717

Determination of kinetic parameters is essential for the aeration activated sludge system design especially the yields coefficient (Y) and endogenous decay coefficient (k_d). According to DOE (2010a), the recommended of design criteria for extended aeration activated sludge system of Y and K_d are 0.1 – 0.3 kg VSS/kg BOD₃ and 0.03 – 0.15 day⁻¹. However, in this study, the kinetic parameters of Y and K_d were found at 0.6718 kg VSS/kg BOD₃ and 0.0658 day⁻¹. The value obtained for K_d was found within the DOE recommendation value, but the value gained for Y was bigger than the DOE recommendation value. This indicated that the design of the aeration activated sludge system for POME treatment is under capacity if compare to the design value recommended by DOE. In fact, the volume of aeration activated sludge system has direct correlation with the value Y as following equation (Tchobanoglous & Stensel 2004; Davis, 2010; Shun, 2014):

$$\text{Aeration Tank Volume, } V_r = \frac{Q_c Q Y (S_i - S_e)}{X [1 + k_d - \theta_c]} \quad (9)$$

Where θ_c = Solid Retention Time (day)
 Q = Influent flow rate (m³/day)

S_i	= Substrate concentration (BOD or COD) influent (mg/L)
S_e	= Substrate concentration (BOD or COD) effluent, (mg/L)
X	= Concentration of MLVSS in aeration tank (mg/L)
Y	= Yield coefficient (kg VSS/kg BOD ₃ or kg VSS/kg COD)
k_d	= Decay coefficient (day ⁻¹)

For the palm oil mill production capacity of 45 ton/h for 24 h operation time per day with POME discharge ratio at 0.65 m³/ton of FFB, volume of aeration tank was calculated at 916.53 m³ and 1,017.12 m³ by using DOE default value and value from this study, respectively. It is clearly shown that the design from DOE recommendation is about 100 m³ or 10% smaller than the design from this study. This might be one of the reasons that most of the POME treatment system doesn't meet the DOE final discharge standard consistently.

Meanwhile, the value of K_s and k was found at 556.1526 mg/L of BOD₃ and 1.4136 day⁻¹, respectively, but in practical, value of K_s and k never used for system design calculation and there was no study has been reported for the above kinetics parameters in BOD basis. However, the same kinetic study of POME in SBR system based on COD basis had reported the Y and k_d at a value of 0.272 mg VSS/mg COD and 0.131 day⁻¹, respectively (Lim and Vadivelu, 2014). The Y and K_d value are higher than the value that was obtained in this study, where Y and K_d was found at a value of 0.2369 mg VSS/mg COD, 0.1060 day⁻¹ respectively. On the other hand, the reported K_s value was 429 mg/L (Lim and Vadivelu, 2014), which is lower than the value of 758.7705 mg/L that gained from this study. The differences of the Y , K_d and K_s value might due to the growing condition and microbial species involve in the biological process. Thus, more thorough study needs to be done to get more precise values of growth kinetic in POME treatment.

4.0 CONCLUSIONS

The success of the biological treatment process depends on the treatment system design. Hence, to get the kinetic parameters that will be used for the aeration tank design, a kinetic study has been carried out by using POME as substrate and activated sludge as inoculum. From the kinetic study experiment, the kinetic parameters for COD and BOD basis had been determined for maximum yields coefficient (Y), endogenous decay coefficient (k_d), maximum specific substrate utilization rate (k) and half-velocity constant (K_s) at 0.2369 mg VSS/mg COD, 0.1060 day⁻¹, 2.2717 day⁻¹ and 758.7705 mg/L for COD basis whilst the kinetic parameters value for BOD basis were 0.6718 mg VSS/mg BOD₃, 0.0658 day⁻¹, 1.4136 day⁻¹ and 556.1526 mg/L, respectively. However, due to the environmental regulatory for BOD discharge standard, kinetic parameters for BOD basis is more appropriate for the calculation of POME treatment system design.

REFERENCES

- Alhaji, A.M., Sanaullah, K., Lim, S.F., Khan, A., Hipolito, C.N., Abdullah, M.O., Bhawani, S.A. and Jamil, T. 2016. Photocatalytic treatment technology for palm oil mill effluent (POME) – A review. *Process Safety and Environmental Protection*. 102, 673-686.
- APHA, 1989. *Standard Methods for the Examination of Water and Wastewater*, 20th ed. Washington D.C, USA: American Public Health Association.

- Azmi, N.S. and Yunus, K.F.M 2014. Wastewater treatment of palm oil mill effluent (POME) by ultrafiltration membrane separation technique coupled with adsorption treatment as pre-treatment. *Agriculture and Agricultural Science Procedia*. 2, 257-264.
- Davis, M.L. 2010. *Water and Wastewater Engineering – Design Principles and Practice (Professional Edition)*(pp. 23-1 – 23-19). McGraw-Hill, USA.
- Department of Environment Malaysia (DOE), 2010. *Guidance Document on the Design and Operation of Industrial Effluent Treatment Systems, Specified in Regulation 5, Environmental Quality (Industrial Effluent) Regulation 2009. 2nd Edition*. Department of Environment Malaysia.
- Lim, J.X. and Vadivelu, V.M. 2014. Treatment of agro based industrial wastewater in sequencing batch reactor: performance evaluation and growth kinetics of aerobic biomass. *Journal of Environmental Management*. 146, 271-225.
- Ma, A.N. and Ong, A.S.H. 1985. Pollution Control in Palm Oil Mills in Malaysia. Palm Oil Research Institute of Malaysia (PORIM). *Journal of the American Oil Chemist's Society (JAOCS)*.63(2), 261-266.
- MPOB, Malaysia Palm Oil Board. 2017. <http://bepi.mpob.gov.my/index.php/en/statistics/sectoral-status/179-sectoral-status-2017/803-number-a-capacities-of-palm-oil-sectors-2017.html>.
- Rasdy, N.F.A., Sanagi, M.M., Ibrahim, W.A.W. and Naim, A.A. 2008. Determination of polycyclic aromatic hydrocarbon in palm oil mill effluent by Soxhlet extraction and gas chromatography-flame ionization detection. *The Malaysian Journal of Analytical Sciences*. 12(1), 16-21.http://www.ukm.my/mjas/v12_n1/3.pdf
- Shun D.L. 2014. *Water and Wastewater Calculations Manual* (pp. 639 – 657). The McGraw-Hills Education.
- Tchobanoglous, G., Burton, F.L. and Stensel, H.D. 2004. *Wastewater Engineering Treatment and Reuse (Fourth Edition)* (pp. 588 – 591). Metcalf & Eddy Inc., McGraw-Hills Education, New York, USA.
- Wong, K.K..1980. Application of Ponding Systems in the Treatment of Palm Oil Mill and Rubber Mill Effluents. *Pertanika*. 3(2),133-141.<https://core.ac.uk/download/pdf/42989362.pdf>
- Wun, W.L., Chua, G.K. and Chin, S.Y. 2017. Effect of palm oil mill effluent (POME) treatment by activated sludge. *Journal CleanWAS*. 1(2), 06-09.
- Yacob, S., M.A.Hassan, Y. Shirai, M.Wakisaka and S.Subahs, 2005. Baseline study of methane emission from open digesting tanks of palm oil mill effluent treatment. *Chemosphere*, 59, 1575-1581.